


Individual mounting

sub-base non "plug-in"	sub-base "plug-in"	

Series

Manifold mounting

sub-base non "plug-in"	sub-base "plug-in"	

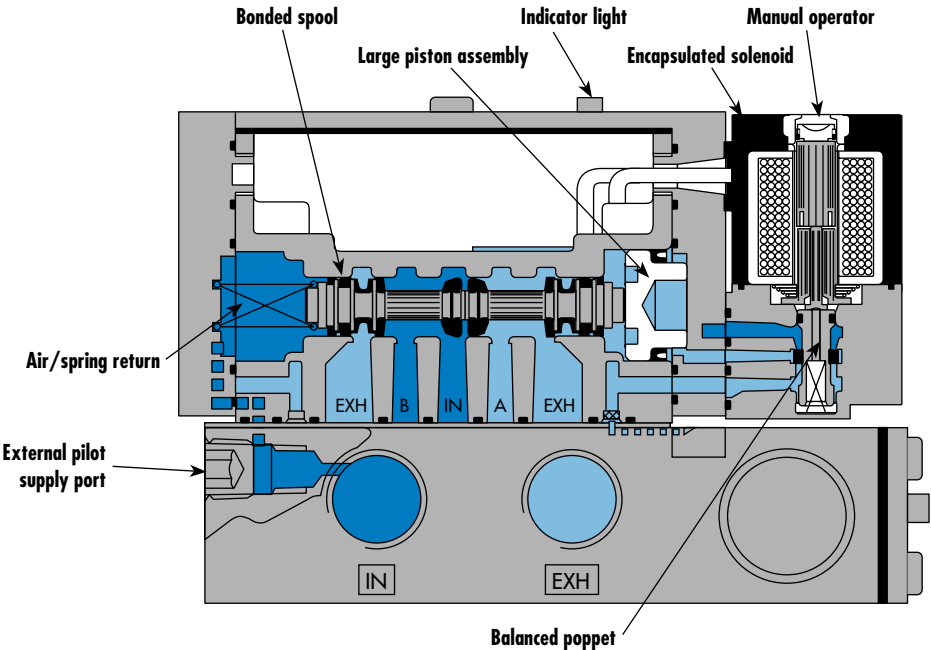

SERIES FEATURES

- Unique patented MACSOLENOID® for fastest possible response times.
- Balanced poppet pilot valve for high flow, precise repeatability, and consistent operation.
- Large spool piston for maximum shifting force even at minimum operating pressure.
- Air/spring return for consistent shifting on single solenoid models.
- MAC spool and bore combination for wiping away contamination, eliminating sticking, and use on non-lube service.
- Patented virtually burn-out proof AC solenoid.
- Plug-in design of valves, bases, flow controls, and regulators for modular assembly and ease of maintenance.
- Optional low wattage DC solenoids down to 1.8 watts.
- Indicator lights in valve body or base and non-plug-in models available.
- Very high flow in a very compact package.

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2


ISO 3

MAC 125A


MAC 250A

MAC 500A


SPOOL CONFIGURATIONS

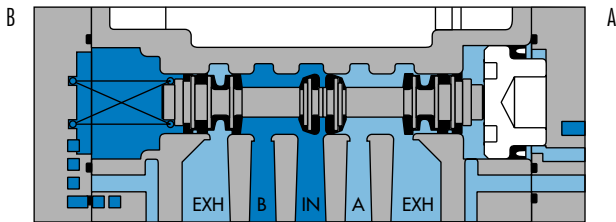


SINGLE OPERATOR
SINGLE INLET - DUAL EXHAUST
SHOWN WITH "B" OPERATOR ENERGIZED

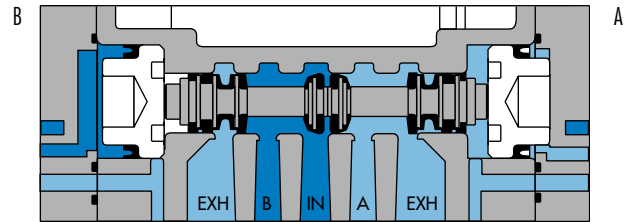


DOUBLE OPERATOR
SINGLE INLET - DUAL EXHAUST
SHOWN WITH "B" OPERATOR ENERGIZED

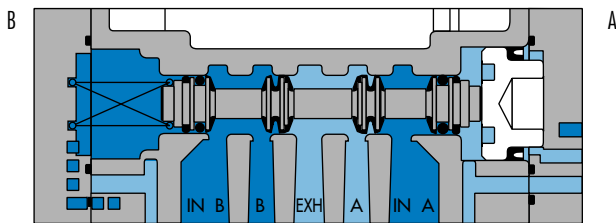


SINGLE OPERATOR
DUAL INLET - SINGLE EXHAUST
SHOWN WITH "B" OPERATOR ENERGIZED

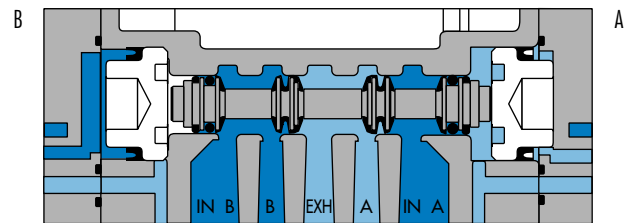


DOUBLE OPERATOR
DUAL INLET - SINGLE EXHAUST
SHOWN WITH "B" OPERATOR ENERGIZED

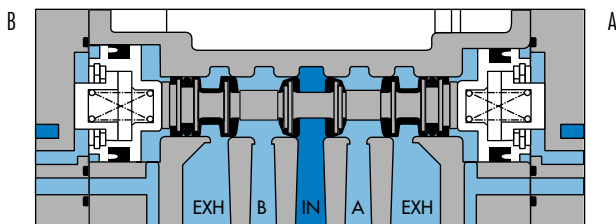


3 POSITION CLOSED CENTER

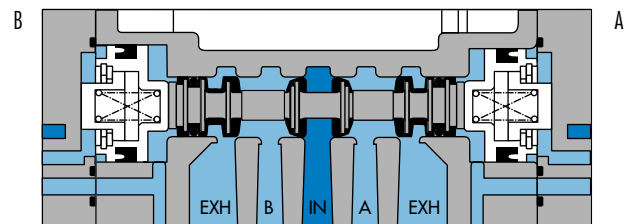

3 POSITION OPEN CENTER

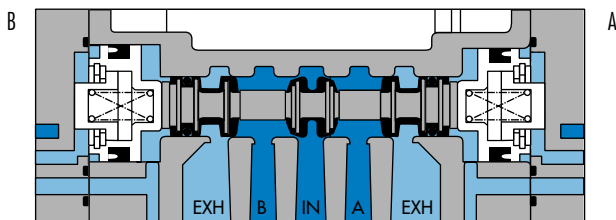

3 POSITION SINGLE PRESSURE
PRESSURE CENTER

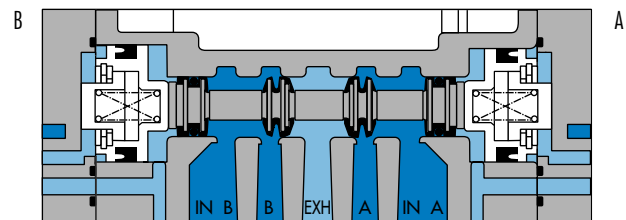


3 POSITION DUAL PRESSURE
PRESSURE CENTER





Function	Port size	Flow [Max]	Individual mounting	Series
4/2 - 4/3	1/8" - 1/4" - 3/8"	1.35 C _v	sub-base non "plug-in"	

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. The piston (booster) provides maximum shifting forces.
4. Powerful return force thanks to the combination of mechanical and air springs.
5. Bonded spool with minimum friction, shifting in a glass-like finished bore.
6. Wiping effect eliminates sticking.
7. Pilot valve with balanced poppet, high flow, short and consistent response times.
8. Long service life.

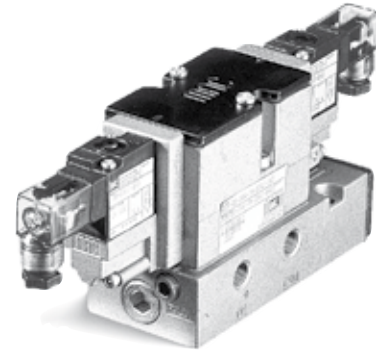

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
						
Valve less base		82A-AB-000-TM-Dxxx-xxx	82A-BB-000-TM-Dxxx-xxx	82A-EB-000-TM-Dxxx-xxx	82A-FB-000-TM-Dxxx-xxx	82A-GB-000-TM-Dxxx-xxx
sub-base	Internal	82A-AB-AAA-TM-Dxxx-xxx	82A-BB-AAA-TM-Dxxx-xxx	82A-EB-AAA-TM-Dxxx-xxx	82A-FB-AAA-TM-Dxxx-xxx	82A-GB-AAA-TM-Dxxx-xxx
1/8" NPTF	External	82A-AB-AAD-TM-Dxxx-xxx	82A-BB-AAD-TM-Dxxx-xxx	82A-EB-AAD-TM-Dxxx-xxx	82A-FB-AAD-TM-Dxxx-xxx	82A-GB-AAD-TM-Dxxx-xxx
sub-base	Internal	82A-AB-BAA-TM-Dxxx-xxx	82A-BB-BAA-TM-Dxxx-xxx	82A-EB-BAA-TM-Dxxx-xxx	82A-FB-BAA-TM-Dxxx-xxx	82A-GB-BAA-TM-Dxxx-xxx
1/4" NPTF	External	82A-AB-BAD-TM-Dxxx-xxx	82A-BB-BAD-TM-Dxxx-xxx	82A-EB-BAD-TM-Dxxx-xxx	82A-FB-BAD-TM-Dxxx-xxx	82A-GB-BAD-TM-Dxxx-xxx
sub-base	Internal	82A-AB-CAA-TM-Dxxx-xxx	82A-BB-CAA-TM-Dxxx-xxx	82A-EB-CAA-TM-Dxxx-xxx	82A-FB-CAA-TM-Dxxx-xxx	82A-GB-CAA-TM-Dxxx-xxx
3/8" NPTF	External	82A-AB-CAD-TM-Dxxx-xxx	82A-BB-CAD-TM-Dxxx-xxx	82A-EB-CAD-TM-Dxxx-xxx	82A-FB-CAD-TM-Dxxx-xxx	82A-GB-CAD-TM-Dxxx-xxx

SOLENOID OPERATOR ➤

D **XX X- X XX**

XX Voltage	X Wire length	X Manual operator	XX
AA 120/60, 110/50	A 18" (Flying leads)	1 Non-locking	KA Square connector
AB 240/60, 220/50	J Connector	2 Locking	KD Square connector with light
AC 24/60, 24/50			JB Rectangular connector
FB 24 VDC (1.8 W)			JD Rectangular connector with light
DA 24 VDC (5.4 W)			BA Flying leads
DF 24 VDC (12.7 W)			

Note : KD connector shown in photo.

* Other options available, see page 361.

OPTIONS

82A-AB-000-TM-Dxxx-xxx

- For dual pressure valves, replace A by C, B by D, E by M, F by L, G by H.
(Requires sandwich regulator, see pressure regulator section.)

82A-AB-000-TM-Dxxx-xxx

- TP (Piped pilot exhaust)
- For pilot exhaust out main exhaust, replace B by E. Also, TM pilot body is replaced by TU pilot body.
- Main exhaust cannot be restricted. Available only on single pressure valves.

82A-XX-BAA-TM-Dxxx-xxx

- Replace A by B for bottom ports (1/8" or 1/4" only)
- Replace A by C for side and bottom ports (1/8" or 1/4" only)

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	1/8" : (0.9 C _v), 1/4" : (1.3 C _v), 3/8" : (1.35 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty.		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 10.9 VA Holding : 7.7 VA = 1.8 to 12.7 W		
Response times :	24 VDC (5.4 W)	Energize : 9 ms	De-energize : 6 ms
	120/60	Energize : 5-12 ms	De-energize : 6-13 ms

Spare parts :


- Solenoid operator (power ≥ 5.4 W) : DXXX-XXX, including mounting screws 35013.
- Seal between solenoid and pilot body : 16402. • Pilot valve : TM-DXXX-XXX, including seal 16447.
- Mounting screw pilot to main valve : 35023. • Pressure seal between valve and base : 16446.
- Mounting screw valve to base (x2) : 35211.

Options :

- BSPP threads. • Flow controls (Part N° : FC82A-BA) • Explosion-proof model.

DIMENSIONS

Dimensions shown are metric (mm)

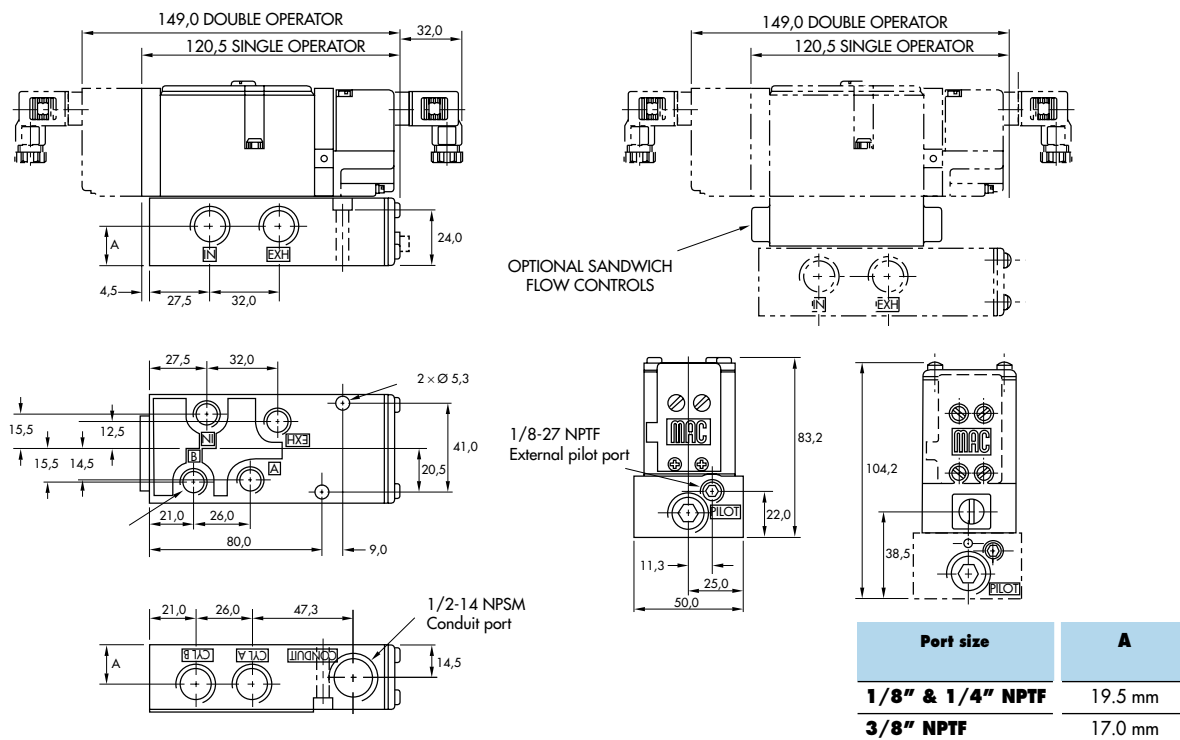

Function	Port size	Flow [Max]	Individual mounting	Series
4/2 - 4/3	1/8" - 1/4" - 3/8"	1.35 C _v	sub-base "plug-in"	

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. The piston (booster) provides maximum shifting forces.
4. Powerful return force thanks to the combination of mechanical and air springs.
5. Bonded spool with minimum friction, shifting in a glass-like finished bore.
6. Wiping effect eliminates sticking.
7. Pilot valve with balanced poppet, high flow, short and consistent response times.
8. Long service life.



HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
Valve less base		82A-AA-000-TM-DxxP-xDA	82A-BA-000-TM-DxxP-xDA	82A-EA-000-TM-DxxP-xDA	82A-FA-000-TM-DxxP-xDA	82A-GA-000-TM-DxxP-xDA
sub-base	Internal	82A-AA-AAA-TM-DxxP-xDA	82A-BA-AAA-TM-DxxP-xDA	82A-EA-AAA-TM-DxxP-xDA	82A-FA-AAA-TM-DxxP-xDA	82A-GA-AAA-TM-DxxP-xDA
1/8" NPTF	External	82A-AA-AAD-TM-DxxP-xDA	82A-BA-AAD-TM-DxxP-xDA	82A-EA-AAD-TM-DxxP-xDA	82A-FA-AAD-TM-DxxP-xDA	82A-GA-AAD-TM-DxxP-xDA
sub-base	Internal	82A-AA-BAA-TM-DxxP-xDA	82A-BA-BAA-TM-DxxP-xDA	82A-EA-BAA-TM-DxxP-xDA	82A-FA-BAA-TM-DxxP-xDA	82A-GA-BAA-TM-DxxP-xDA
1/4" NPTF	External	82A-AA-BAD-TM-DxxP-xDA	82A-BA-BAD-TM-DxxP-xDA	82A-EA-BAD-TM-DxxP-xDA	82A-FA-BAD-TM-DxxP-xDA	82A-GA-BAD-TM-DxxP-xDA
sub-base	Internal	82A-AA-CAA-TM-DxxP-xDA	82A-BA-CAA-TM-DxxP-xDA	82A-EA-CAA-TM-DxxP-xDA	82A-FA-CAA-TM-DxxP-xDA	82A-GA-CAA-TM-DxxP-xDA
3/8" NPTF	External	82A-AA-CAD-TM-DxxP-xDA	82A-BA-CAD-TM-DxxP-xDA	82A-EA-CAD-TM-DxxP-xDA	82A-FA-CAD-TM-DxxP-xDA	82A-GA-CAD-TM-DxxP-xDA

SOLENOID OPERATOR ➤

D **XX** P- **X** DA*

XX	Voltage	X	Manual operator
AA	120/60, 110/50	1	Non-locking
AB	240/60, 220/50	2	Locking
AC	24/60, 24/50		
FB	24 VDC (1.8 W)		
DA	24 VDC (5.4 W)		
DF	24 VDC (12.7 W)		

* Other options available, see page 361.

OPTIONS

82A-AA-000-TM-DxxP-xDA

- For light in body replace A by C.
- For pilot exhaust out main exhaust replace A by D. For light replace A by F. Use TU pilot body for pilot exhaust to main exhaust, main exhaust cannot be restricted (NO flow controls) available with single pressure valve only. TU replaces TM.
- For piped pilot exhaust replace TM by TP.
- For dual pressure valves, replace A by C, B by D, E by M, F by L, G by H. (Requires sandwich regulator - see pressure regulator section)

82A-AA-BAA-TM-DxxP-xDA

- Replace A by B for bottom ports (1/8" or 1/4" only)
- Replace A by C for side and bottom ports (1/8" or 1/4" only)

TECHNICAL DATA


Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	1/8" : (0.9 C _v), 1/4" (1.3 C _v), 3/8" : (1.35 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty.		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 10.9 VA Holding : 7.7 VA = 1.8 to 12.7 W		
Response times :	24 VDC (5.4 W)	Energize : 9 ms	De-energize : 6 ms
	120/60	Energize : 5-12 ms	De-energize : 6-13 ms

Spare parts : • Solenoid operator (power ≥ 5.4 W) : DXXP-XDA, including mounting screws 35013. • Seal between solenoid and pilot body : 16402.
• Pilot valve : TM-DXXP-XDA, including seal 16447. • Mounting screw pilot to main valve : 35023. • Pressure seal between valve and base : 16446.
• Mounting screw valve to base (x2) : 35211.

Options : • BSPP threads. • Flow controls (Part N°. FC82A-AA) • Explosion-proof model. • Lights in base.

DIMENSIONS


Dimensions shown are metric (mm)

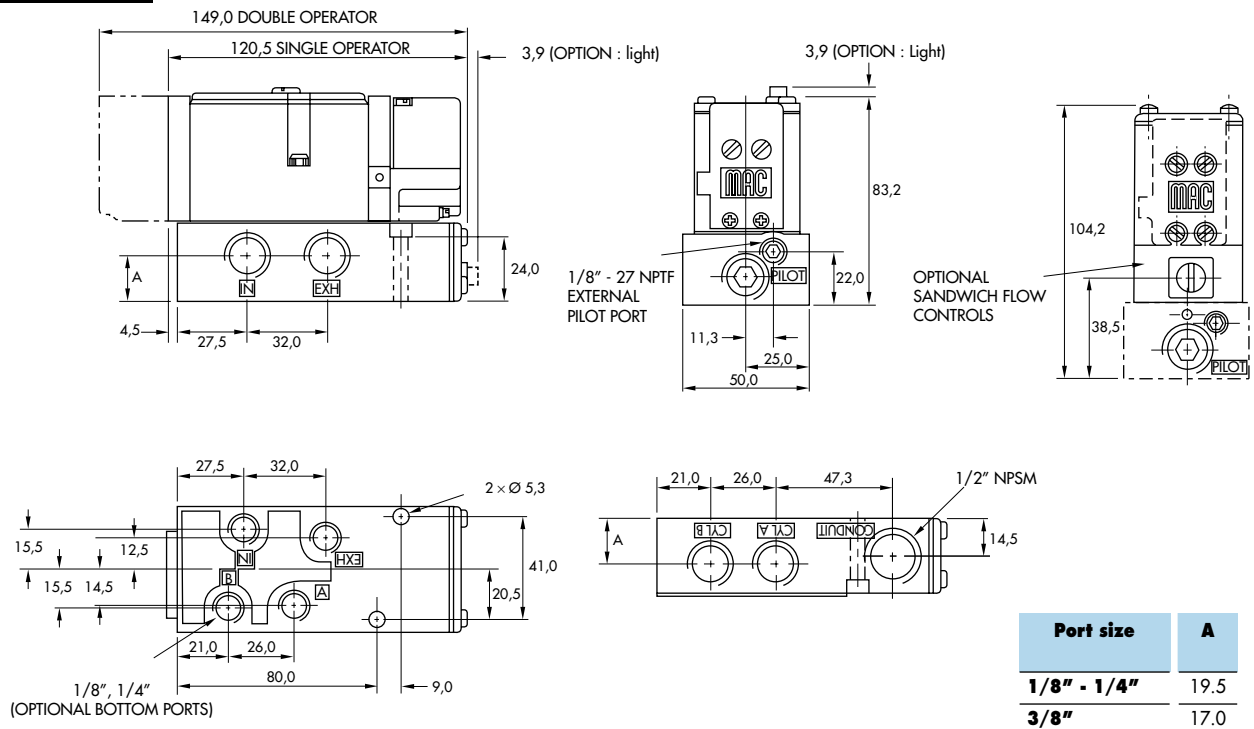


Function	Port size	Flow [Max]	Manifold mounting	Series
4/2 - 4/3	1/4" - 3/8"	1.35 C _v	sub-base non "plug-in"	

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. The piston (booster) provides maximum shifting forces.
4. Powerful return force thanks to the combination of mechanical and air springs.
5. Bonded spool with minimum friction, shifting in a glass-like finished bore.
6. Wiping effect eliminates sticking.
7. Pilot valve with balanced poppet, high flow, short and consistent response times.
8. Long service life.

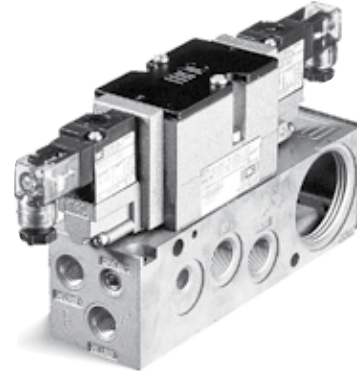

HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
						
Valve less base		82A-AB-000-TM-Dxxx-xxx	82A-BB-000-TM-Dxxx-xxx	82A-EB-000-TM-Dxxx-xxx	82A-FB-000-TM-Dxxx-xxx	82A-GB-000-TM-Dxxx-xxx
sub-base	Internal	82A-AB-BKA-TM-Dxxx-xxx	82A-BB-BKA-TM-Dxxx-xxx	82A-EB-BKA-TM-Dxxx-xxx	82A-FB-BKA-TM-Dxxx-xxx	82A-GB-BKA-TM-Dxxx-xxx
1/4" NPTF	External	82A-AB-BKD-TM-Dxxx-xxx	82A-BB-BKD-TM-Dxxx-xxx	82A-EB-BKD-TM-Dxxx-xxx	82A-FB-BKD-TM-Dxxx-xxx	82A-GB-BKD-TM-Dxxx-xxx
sub-base	Internal	82A-AB-CKA-TM-Dxxx-xxx	82A-BB-CKA-TM-Dxxx-xxx	82A-EB-CKA-TM-Dxxx-xxx	82A-FB-CKA-TM-Dxxx-xxx	82A-GB-CKA-TM-Dxxx-xxx
3/8" NPTF	External	82A-AB-CKD-TM-Dxxx-xxx	82A-BB-CKD-TM-Dxxx-xxx	82A-EB-CKD-TM-Dxxx-xxx	82A-FB-CKD-TM-Dxxx-xxx	82A-GB-CKD-TM-Dxxx-xxx

SOLENOID OPERATOR ➤

XX Voltage	X Wire length	X Manual operator	XX
AA 120/60, 110/50	A 18" (Flying leads)	1 Non-locking	KA Square connector
AB 240/60, 220/50	J Connector	2 Locking	KD Square connector with light
AC 24/60, 24/50			JB Rectangular connector
FB 24 VDC (1.8 W)			JD Rectangular connector with light
DA 24 VDC (5.4 W)			BA Flying leads
DF 24 VDC (12.7 W)			

* Other options available, see page 361.

Note : KD connector shown in photo.

OPTIONS

82A-AB-000-TM-Dxxx-xxx

- For pilot exhaust out main exhaust replace B by E. Also, TM pilot body is replaced by TU pilot body. Main exhaust cannot be restricted (No flow controls) available with single pressure valve only.
- For piped pilot exhaust replace TM by TP.
- For dual pressure valves, replace A by C, B by D, E by M, F by L, G by H. (Requires sandwich regulator - see pressure regulator section)

82A-XX-BKA-TM-Dxxx-xxx

- Replace K by L for bottom cyl. ports
- Replace K by M for bottom inlet port
- Replace K by N for bottom inlet and cyl. ports
- Replace K by P for bottom and end cyl. ports
- Replace K by R for bottom and end cyl. ports w/bottom inlet
- Replace K by S for selector base with side ports

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	1/4" (1.3 C _v), 3/8" : (1.35 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty.		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 10.9 VA Holding : 7.7 VA = 1.8 to 12.7 W		
Response times :	24 VDC (5.4 W)	Energize : 9 ms	De-energize : 6 ms
	120/60	Energize : 5-12 ms	De-energize : 6-13 ms

Spare parts :


- Solenoid operator (power ≥ 5.4 W) : DXXX-XXX, including mounting screws 35013.
- Seal between solenoid and pilot body : 16402. • Pilot valve : TM-DXXX-XXX, including seal 16447.
- Mounting screw pilot to main valve : 35023. • Pressure seal between valve and base : 16446.
- Mounting screw valve to base (x2) : 35211. • Tie-rod (x2) : 19731. • Fastening kit : N-82005-01.

Options :

- BSPP threads. • Flow controls (Part N°: FC82A-BA) • Explosion-proof model.

DIMENSIONS

Dimensions shown are metric (mm)

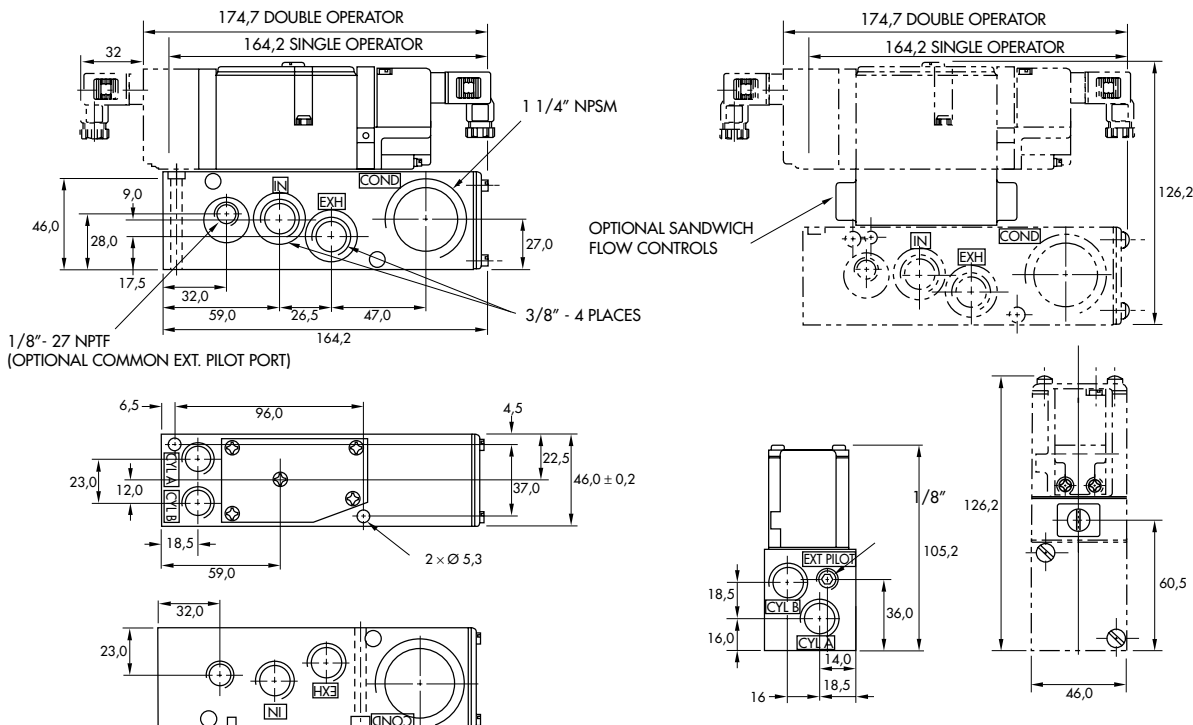




Function	Port size	Flow [Max]	Manifold mounting	Series
4/2 - 4/3	1/4" - 3/8"	1.35 C_v	sub-base "plug-in"	

OPERATIONAL BENEFITS

1. Balanced spool, immune to variations of pressure.
2. Short stroke with high flow.
3. The piston (booster) provides maximum shifting forces.
4. Powerful return force thanks to the combination of mechanical and air springs.
5. Bonded spool with minimum friction, shifting in a glass-like finished bore.
6. Wiping effect eliminates sticking.
7. Pilot valve with balanced poppet, high flow, short and consistent response times.
8. Long service life.



HOW TO ORDER

Port size	Pilot air	4/2 Single operator	4/2 Double operator	4/3 Closed center	4/3 Open center	4/3 Pressure center
						
Valve less base		82A-AA-000-TM-DxxP-xDA	82A-BA-000-TM-DxxP-xDA	82A-EA-000-TM-DxxP-xDA	82A-FA-000-TM-DxxP-xDA	82A-GA-000-TM-DxxP-xDA
sub-base	Internal	82A-AA-BKA-TM-DxxP-xDA	82A-BA-BKA-TM-DxxP-xDA	82A-EA-BKA-TM-DxxP-xDA	82A-FA-BKA-TM-DxxP-xDA	82A-GA-BKA-TM-DxxP-xDA
1/4" NPTF	External	82A-AA-BKD-TM-DxxP-xDA	82A-BA-BKD-TM-DxxP-xDA	82A-EA-BKD-TM-DxxP-xDA	82A-FA-BKD-TM-DxxP-xDA	82A-GA-BKD-TM-DxxP-xDA
sub-base	Internal	82A-AA-CKA-TM-DxxP-xDA	82A-BA-CKA-TM-DxxP-xDA	82A-EA-CKA-TM-DxxP-xDA	82A-FA-CKA-TM-DxxP-xDA	82A-GA-CKA-TM-DxxP-xDA
3/8" NPTF	External	82A-AA-CKD-TM-DxxP-xDA	82A-BA-CKD-TM-DxxP-xDA	82A-EA-CKD-TM-DxxP-xDA	82A-FA-CKD-TM-DxxP-xDA	82A-GA-CKD-TM-DxxP-xDA

SOLENOID OPERATOR ►

D xx P- x DA*

xx	Voltage
AA	120/60, 110/50
AB	240/60, 220/50
AC	24/60, 24/50
FB	24 VDC (1.8 W)
DA	24 VDC (5.4 W)
DF	24 VDC (12.7 W)

x	Manual operator
1	Non-locking
2	Locking

* Other options available, see page 361.

OPTIONS

82A-AA-000-TM-DxxP-xDA

- For light in body replace A by C.
- For pilot exhaust out main exhaust replace A by D. For light replace A by F. Use TU pilot body for pilot exhaust to main exhaust, main exhaust cannot be restricted (No flow controls) available with single pressure valve only. TU replaces TM.
- For piped pilot exhaust replace TM by TP.
- For dual pressure valves, replace A by C, B by D, E by M, F by L, G by H. (Requires sandwich regulator - see pressure regulator section)

82A-XX-BKA-TM-DxxP-xDA

- Replace K by L for bottom cyl. ports
- Replace K by M for bottom inlet port
- Replace K by N for bottom inlet and cyl. ports
- Replace K by P for bottom and end cyl. ports
- Replace K by R for bottom and end cyl. ports w/bottom inlet
- Replace K by S for selector base with side ports

35

100

200

55

56

57

58

59

45

700

900

82

6300

6500

6600

1300

800

ISO 1

ISO 2

ISO 3

MAC 125A

MAC 250A

MAC 500A

TECHNICAL DATA

Fluid :	Compressed air, vacuum, inert gases		
Pressure range :	Internal pilot : single operator and 3 positions : 25-150 PSI double operator : 10-150 PSI External pilot : vacuum to 150 PSI		
Pilot pressure :	Single operator and 3 positions : 25-150 PSI Double operator : 10-150 PSI		
Lubrication :	Not required, if used select a medium aniline point lubricant (between 180°F to 210°F)		
Filtration :	40 µ		
Temperature range :	0°F to 120°F (-18°C to 50°C)		
Flow (at 6 bar, ΔP=1bar) :	1/4" (1.3 C _v), 3/8" : (1.35 C _v)		
Coil :	Epoxy encapsulated - class A wires - Continuous duty.		
Voltage range :	-15% to +10% of nominal voltage		
Protection :	Consult factory		
Power :	~ Inrush : 10.9 VA Holding : 7.7 VA = 1.8 to 12.7 W		
Response times :	24 VDC (5.4 W)	Energize : 9 ms	De-energize : 6 ms
	120/60	Energize : 5-12 ms	De-energize : 6-13 ms

Spare parts :

- Solenoid operator (power ≥ 5.4 W) : DXXP-XDA, including mounting screws 35013.
- Seal between solenoid and pilot body : 16402. • Pilot valve : TM-DXXP-XDA, including seal 16447.
- Mounting screw pilot to main valve : 35023. • Pressure seal between valve and base : 16446.
- Mounting screw valve to base (x2) : 35211. • Tie-rod (x2) : 19731. • Fastening kit : N-82005-01.

Options :

- BSPP threads. • Flow controls (Part N° FC82A-AA) • Explosion-proof model. • Lights in base.

DIMENSIONS

Dimensions shown are metric (mm)

